

宁波天波港联电子有限公司

NINGBO TIANBO GANGLIAN ELECTRONICS CO., LTD

TRFM 技术指标

文件编号:

SPECIFICATION

FILE NUMBER: T810S-A009A

DATE: 2004/06/25

◆ CONTACT DATA 触点参数

Contact Form 触点形式	1H 1Z		
Contact Material 触点材料	Silver Alloy		
Load 负载	Resistive load(COS Φ 1)		
Contact Ratings 触点负载	1A:25A 14VDC	1C :20A 14VDC	
Minimum load 最小负载			
Max Switching Voltage 最大转换电压	75VDC		
Max Switching Current 最大转换电流	25A		
Max Switching Power 最大转换功率	350W		
Contact Resistance 接触电阻	50m Ω Max	at 6VDC 1A	
Life Expectancy 寿命	Electrical 电气寿命	100, 000	Operations(at30Operations/minute)
	Mechanical 机械寿命	10, 000, 000	Operations(at300Operations/minute)

◆ GENERAL DATA 一般参数

Insulation Resistance 绝缘阻值	100M Ω Min at 500VDC		
Dielectric Strength Between Open Contacts 触点间耐压	1000VAC(50/60Hz for one minute)		
Between Contacts and coil 触点与线圈间耐压	1000VAC(50/60Hz for one minute)		
Operate Time 吸合时间	10ms		
Release Time 释放时间	10ms		
Temperature Range 环境温度	-40℃ to +85℃		
Shock Resistance 冲击	Operating Extremes 动作极限	10G	
	Damage Limits 破坏极限	100G	
Vibration Resistance 振动	10-50Hz, 1.5mm		
Max. switching frequency 最大转换频率	Mechanical: 18,000operations/hr Electrical: 1,800operations/hr		
Humidity 湿度	45-85%		
Weight 重量	Approx 18g		
Safety Standard 安全标准			

◆ COIL DATA 线圈参数

Coil Power 1.2W


Nominal Voltage 额定电压 (VDC)	Coil Resistance at 20±10%(Ω) 线圈阻值	Rated current 额定电流 mA	Max Operate Voltage 最大吸合电压 VDC	Min Release Voltage 最小释放电压 VDC	Max Applicable Voltage 最大过载电压 VDC
					At 23℃
6	30	200	3.9	0.3	7.8
12	120	100	7.8	0.6	15.6
24	480	50	15.6	1.2	31.2

Coil Power 1.6W

Nominal Voltage 额定电压 (VDC)	Coil Resistance at 20±10%(Ω) 线圈阻值	Rated current 额定电流 mA	Max Operate Voltage 最大吸合电压 VDC	Min Release Voltage 最小释放电压 VDC	Max Applicable Voltage 最大过载电压 VDC
					At 23°C
6	23	261	3.9	0.3	7.8
12	90	133	7.8	0.6	15.6
24	360	67	15.6	1.2	31.2

◆ ORDERING CODE 订购代码

TRFM D—12VDC—S—H

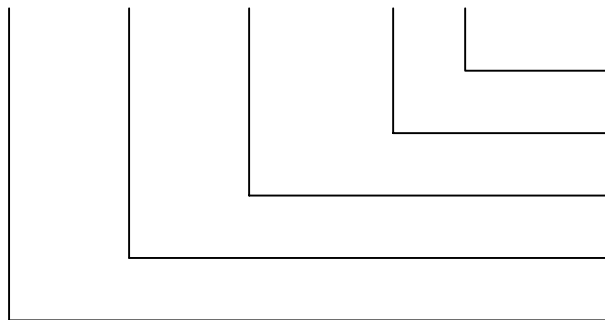


1H Form 1A 触点转换形式
 1Z Form 1C
 Sealed 塑封
 Nil: 不塑封
 Coil Nominal Voltage 线圈额定电压

D=1.6W L=1.2W

Relay Model 继电器型号

◆ OVERALL AND MOUNTING DIMENSIONS 安装图

安装图(B型)

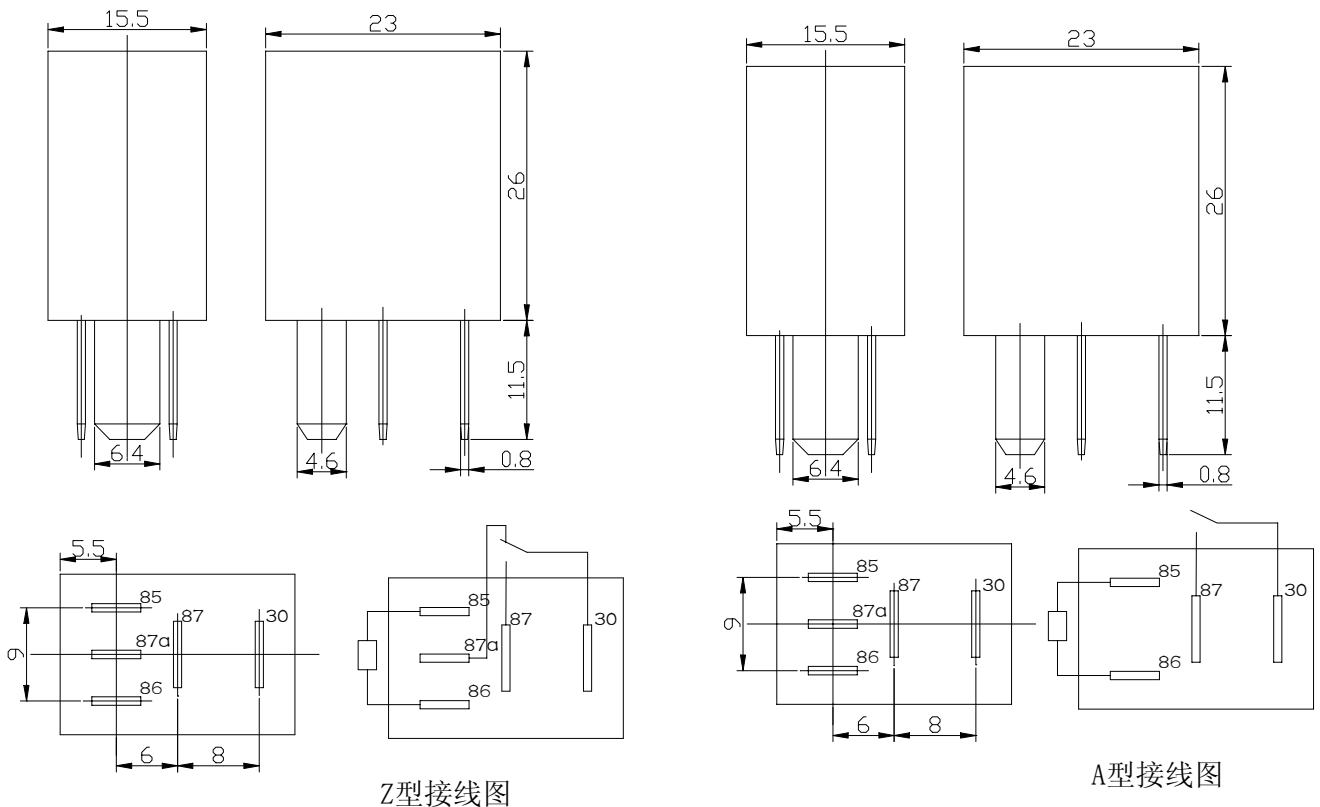

Z型接线图

A型接线图