



P O L Y K E N

I N D U S T R I A L T A P E S

POLYKEN® 110

Utility-grade Resin-sized Cloth Tape

APPLICATIONS

- Used for holding oven doors and drawers on porcelain-finished stoves while in transit.
- For covering breather pipes, fill pipes, water jackets, and spark plug holes in the manufacture of gasoline and diesel motors.
- For sealing doors and windows; bundling loose parts.


FEATURES & BENEFITS

- Printable cloth.
- Highly conformable.
- High adhesion.
- Leaves no residue.

APPROVALS

- ESB-M3G56-A

CONSTRUCTION

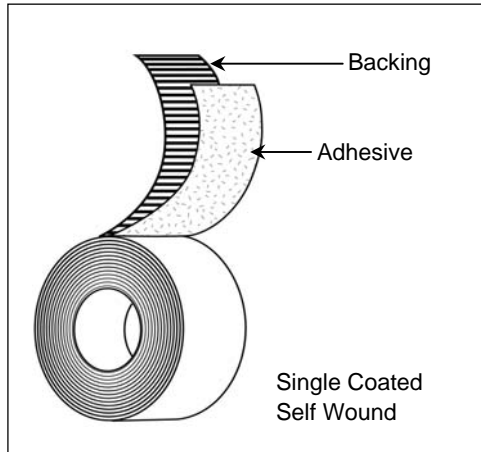

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Cotton print cloth treated for ease in handling.

Adhesive:

- Black reclaim rubber.

Colors:

- Black

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	11 mils	0.279 mm	ASTM D 1000
Adhesion to Steel	35 oz./in.	39.2 g/mm	PSTC-1
Adhesion to Backing	35 oz./in.	39.2 g/mm	PSTC-1
Tensile Strength	45 lb./in.	0.81 kg/mm	ASTM D 1000
Maximum Performance Temperature	200 D F		

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.

Tyco
Adhesives

CORPORATE HEADQUARTERS

25 FORGE PARKWAY
FRANKLIN, MA 02038
1-800-343-7875
Fax: 1-800-328-4822

www.tycoadhesives.com

A tyco INTERNATIONAL LTD. COMPANY