



# POLYKEN® 264NFR

A U T O M O T I V E T A P E S

## POLYKEN® 264NFR

Non-Halogen Wire Harness Tape

### APPLICATIONS

- Ideal for use on instrument panel and other interior automotive wiring harnesses
- Continuous operating temperature to 85° C
- Fabric content eliminates noise and squeak
- Spot taping, clip retention or continuous wrap


### FEATURES & BENEFITS

- Non-Halogen
- Consistent unwind throughout the roll
- Easy tear and application
- Excellent conformability and elongation
- Resistant to typical automotive fluids
- Standard roll sizes:  
.5" x 100ft      1" x 100ft  
.75" x 100ft    2" x 100ft

### APPROVALS

- DaimlerChrysler MS-CH71C

### CONSTRUCTION

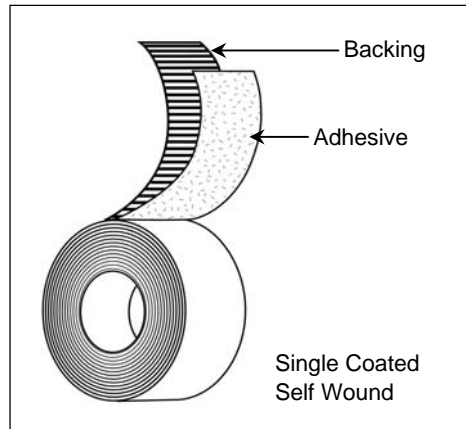

### PRODUCT DESCRIPTION

**Backing:**

- Polymeric and fabric composite

**Adhesive:**

- Black natural rubber

**Colors:**

- Black

**Temperature Rating:**

- 85° C continuous

### TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	8.0 mils	0.20 mm	ASTM D-1000
Adhesion To Steel	45.0 oz./in.	4.90 N/cm	PSTC-1
Adhesion To Backing	20 oz./in.	2.19 N/cm	PSTC-1
Tensile Strength	20.0 lb./in.	35.00 N/cm	ASTM D-1000
Unwind Force	25 oz./in.	2.74 N/cm	PSTC-8
Elongation	10 %		ASTM D-1000
Resistance To Typical Auto Fluids			
Room Temperature	Pass		
Elevated Temperatures	Pass		
Temperature Rating	85° C		
Shelf Life @ 25° C (77° F)	12 Months		

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.

### Corporate Headquarters

25 Forge Parkway  
Franklin, MA 02038  
Tel: 508-918-1600  
Tel: 1-800-248-7659  
Fax: 1-800-328-4822

[www.tycoadhesives.com](http://www.tycoadhesives.com)

REV-1/27/05

### Asia

No. 13 Jalan PJU 1/42  
Dataran Prima  
47301 Petaling Jaya  
Selengor, Malaysia  
60-3-7800-7776



QS-9000 Certified/ISO9001 Certified

# Tyco Adhesives

A tyco INTERNATIONAL LTD. COMPANY