



P O L Y K E N 266

A U T O M O T I V E T A P E S

POLYKEN® 266

Wire Harness Tape


APPLICATIONS

- Uniquely designed for use in wire harness applications for the appliance industry.
- Splice insulation.
- Spot taping.
- Clip retention.
- Continuous wrap over the length of the wire harness.

FEATURES & BENEFITS

- Highly conformable PE-backed cloth tape.
- Non-corrosive when in direct contact with copper wire.
- Unique patented fabric construction and state-of-the-art processing technology result in excellent conformability and elongation properties.
- Standard roll sizes:
 - .5" x 100ft
 - 1" x 100ft
 - 1" x 60yd
 - 2" x 60yd

CONSTRUCTION

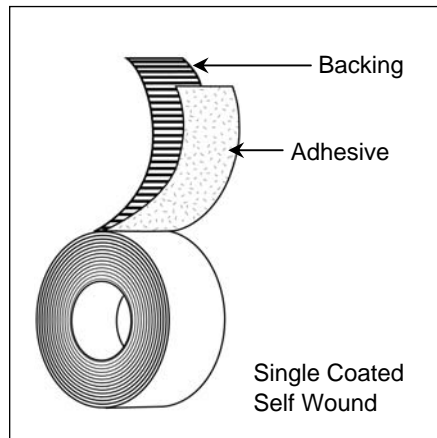

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Multi-layered polymeric & fabric composite

Adhesive:

- Blended rubber.

Colors:

- Black

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	8 mils	0.203 mm	ASTM D 1000
Adhesion to Steel	56 oz./in.	62.0 g/mm	PSTC-1
Adhesion to Backing	21 oz./in.	23.50 g/mm	PSTC-1
Tensile Strength	20 lb./in.	0.36 kg/mm	ASTM D 1000
Unwind Force	32 oz./in.	35.8 g/mm	PSTC-8
Temperature Rating	85 D C		
Elongation (%)	7 %		ASTM D 1000
Tack	5 inches	12.7 cm	PSTC-6
Shelf Life	12 mos		

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.

Corporate Headquarters

25 Forge Parkway
Franklin, MA 02038
Tel: 508-918-1600
Tel: 1-800-248-7659
Fax: 1-800-328-4822

www.tycoadhesives.com

REV-1/27/05

Asia

No. 13 Jalan PJU 1/42
Dataran Prima
47301 Petaling Jaya
Selengor, Malaysia
60-3-7800-7776



QS-9000 Certified/ISO9001 Certified

Tyco
Adhesives