



P O L Y K E N 285

A U T O M O T I V E T A P E S

POLYKEN® 285

Waterproof tape

APPLICATIONS

- Wire splicing
- Waterproofing
- Permanent hold
- Other high-performance applications

FEATURES & BENEFITS


- Conformable
- Aggressive adhesive system
- Low water and vapor penetration
- Standard roll sizes:

.5" x 60yd	1.5" x 60yd
.75" x 60yd	48mm x 55m
1" x 60yd	2.5" x 60yd
1.25" x 60yd	4" x 60yd

APPROVALS

- Delphi Packard (GM) M0537

CONSTRUCTION

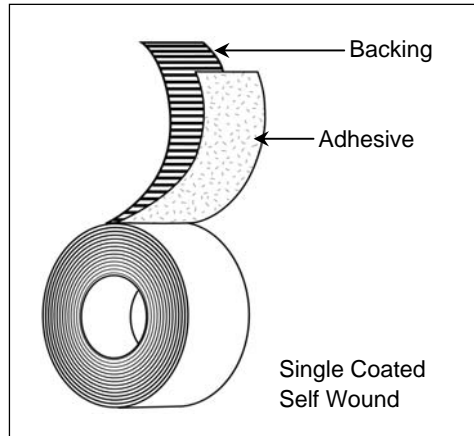

PRODUCT DESCRIPTION

Backing:

- Black polyethylene coated cloth

Adhesive:

- Rubber based

Colors:

- Black

Temperature Rating:

- 105° C

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	11.0 mils	0.28 mm	ASTM D-1000
Adhesion To Steel	44 oz./in.	.48 N/mm	PSTC-1
Adhesion To Backing	34 oz./in.	.37 N/mm	PSTC-1
Adhesion to PVC	48 oz./in.	0.525 N/mm	PSTC-1
Adhesion to Polyethylene	43 oz./in.	0.47 N/mm	PSTC-1
Tensile Strength	25 lb./in.	4.37 N/mm	ASTM D-1000
Elongation	5.0 %		ASTM D-1000
Shelf Life @ 25° C (77° F)	12 Months		

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.

Corporate Headquarters

25 Forge Parkway
Franklin, MA 02038
Tel: 508-918-1600
Tel: 1-800-248-7659
Fax: 1-800-328-4822

www.tycoadhesives.com

REV-1/27/05

Asia

No. 13 Jalan PJU 1/42
Dataran Prima
47301 Petaling Jaya
Selengor, Malaysia
60-3-7800-7776



QS-9000 Certified/ISO9001 Certified

Tyco Adhesives